

EBARA

Model DWU/DWXU

Dominator™

sump, effluent



EBARA International Corporation

Standard Pump Division

Model DWU / DWXU

Features


- High quality stainless steel
- 2" solids handling
- Single and three phase models available
- Motor is 2 pole, dry submerged, rated continuous duty
- Class F motor insulation
- 104°F max. fluid temperature continuous operation, fully submerged;
140° F intermittent operation
- Automatic and manual operation
- Auto float switch is mechanical/non-mercury
- NPT thread discharge (or 150 lb ANSI flange)
- Double mechanical seal with viton elastomers
- Shielded, prelubricated ball bearings 50,000 hour
- Single channel and vortex impellers
- Thermal overloads (single phase models)
- Flows to 210 GPM, heads to 65 feet

Applications


- Wastewater with suspended solids
- Residential
- Commercial
- Industrial
- Fountains, water displays
- Containment transfer
- Irrigation
- Drainage
- Emptying (pools, water storage structures)

DWU, DWXU selection charts

- Single channel impeller
- Single & three phase
- Manual or automatic operation
- Threaded or flanged discharge

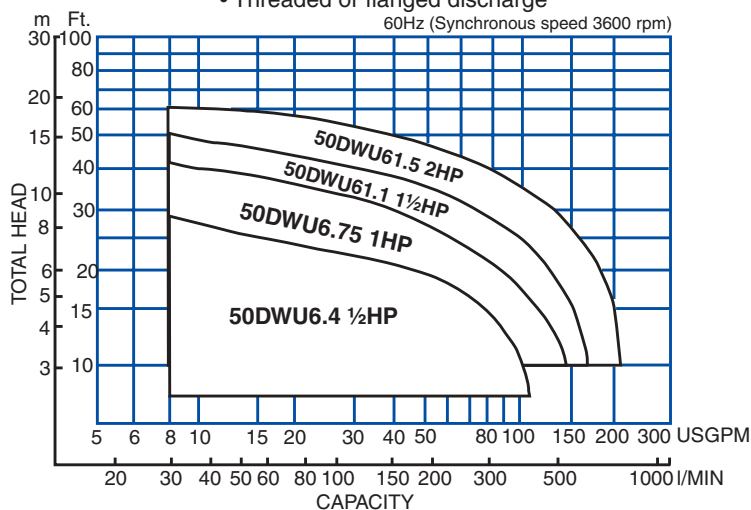

- Vortex impeller
- Single & three phase
- Manual or automatic operation
- Threaded or flanged discharge

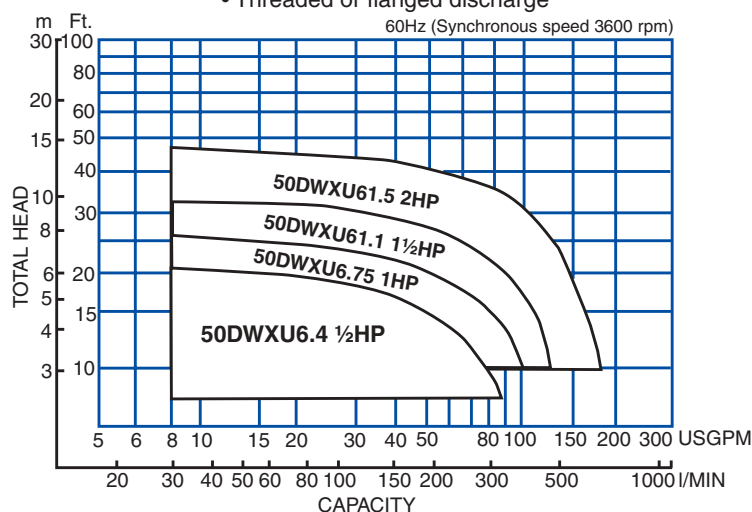

EBARA International Corporation

Standard Pump Division

1651 Cedar Line Drive • Rock Hill, SC 29730 • (t) 803 327 5005 • (f) 803 327 5097

info@pumpsebara.com • www.pumpsebara.com

© 2005 EBARA International Corporation

EICDWU 0105