





MODEL LC-3CP-MD

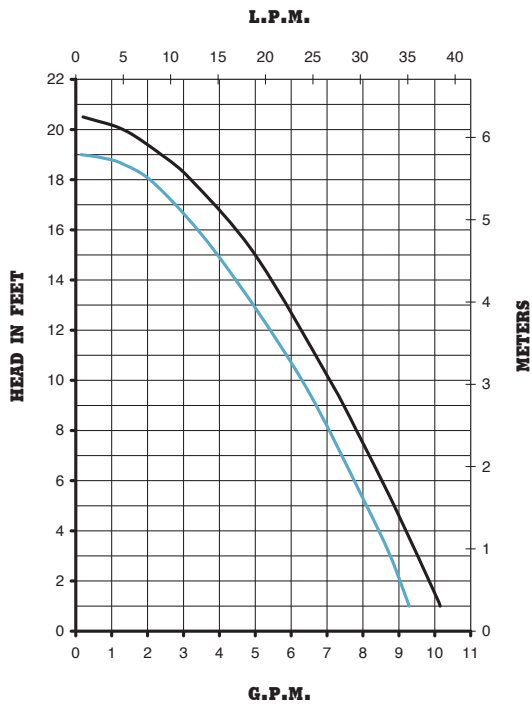

MODEL AC-3CP-MD



MODEL BC-3CP-MD



SERIES 3

SERIES 3	LC-3CP-MD	AC-3CP-MD	BC-3CP-MD	BC-3K-MD
Max Flow	8.5 GPM	10 GPM	10 GPM	10 GPM
Max Head	19 Feet	20.5 Feet	20.5 Feet	20.5 Feet
Inlet	3/4" FPT	3/4" FPT	3/4" FPT	3/4" FPT
Outlet	1/2" MPT	1/2" MPT	1/2" MPT	1/2" MPT
HP	1/20	1/15	1/15	1/15
RPM	3450	3450	3450	3450
Volts	115 or 230	115 or 230	115 or 230	115 or 230
Phase	1	1	1	1
Amps	2.0 1.0	2.3 0.9	2.1 0.9	2.1 0.9
Motor Type	TE/SUB Maroon	Air Cooled	Blast Cooled	Blast Cooled
Elec. Connect.	Cord	Leads	Leads	Leads
Max Int. Press.	25 PSI	50 PSI	50 PSI	75 PSI
Max Liquid Temp.	130 F	190 F	190 F	200 F
Weight Packed	8.5 lbs.	7 lbs.	8 lbs.	8 lbs.
Materials in Contact	Polypropylene, Epoxy, Cupric Nickel, Buna N, Ceramic Magnet	Polypropylene, Ceramic Magent, Ceramic, Buna N *	Polypropylene, Ceramic, Ceramic, Viton *	Kynar, Ceramic, Viton *

*Smooth inlet/outlet available

SERIES 3

847.729.5300

