



MODEL TE-5.5C-MD-AC




MODEL TE-5.5C-MD



MODEL TE-5.5S-MD



MODEL TE-6T-MD

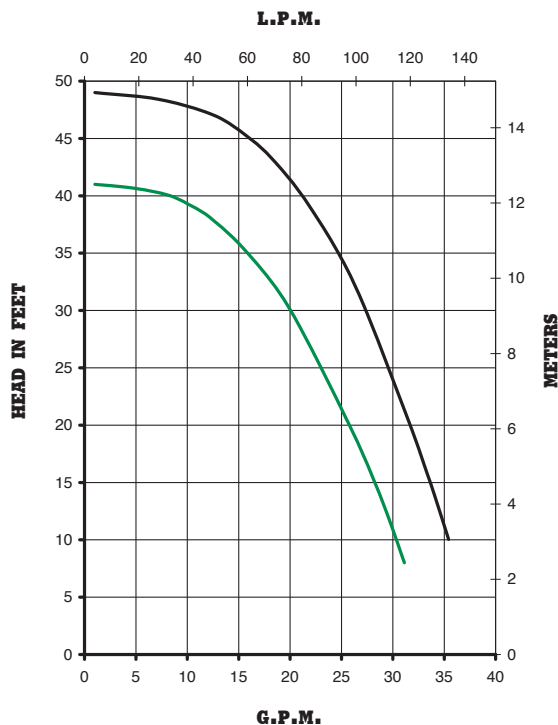

SERIES 5.5 & 6

SERIES 5.5 & 6	TE-5.5C-MD	TE-5.5K-MD	TE-5.5S-MD	TE-6T-MD	TE-6K-MD
Max Flow	30 GPM	30 GPM	30 GPM	38 GPM	38 GPM
Max Head	41 FT	41 FT	41 FT	49 FT	49 FT
Inlet	1" FPT	1" FPT	1" FPT	1" FPT	1" FPT
Outlet	3/4" MPT	3/4" MPT	3/4" MPT	3/4" MPT	3/4" MPT
HP	1/3	1/3	1/3	1/2	1/2
RPM	3450	3450	3450	3450	3450
Volts	115/230 or 230/460	115/230 or 230/460	115/230 or 230/460	115/230 or 230/460	115/230 or 230/460
Phase	1 or 3	1 or 3	1 or 3	1 or 3	1 or 3
Amps	1 (4.4/2.2) 3 (1.2/.6)	1 (4.4/2.2) 3 (1.2/.6)	1 (4.4/2.2) 3 (1.2/.6)	1 (7.4/3.7) 3 (1.5/.7)	1 (7.4/3.7) 3 (1.5/.7)
Motor Type	TEFC	TEFC	TEFC	TEFC	TEFC
Elec. Connect.	Conduit Box	Conduit Box	Conduit Box	Conduit Box	Conduit Box
Max Int. Press.	50 PSI	75 PSI	200 PSI	50 PSI	75PSI
Max Liquid Temp.	190 F	200 F	250 F	190 F	200 F
Weight Packed	34.5 lbs.	35 lbs.	39 lbs.	34.5 lbs.	34.5 lbs.
Materials in Contact	Polypropylene, Ceramic, Viton *	Kynar, Ceramic, Viton *	316 Stainless Steel, Viton, Ceramic, Carbon Bushing	Polypropylene, Ryton, Ceramic, Viton, Teflon/ Ryton/Carbon Bushing **	Kynar, Ceramic, Viton, Carbon Bushing **

*Air Cooled motor available

**Drip Proof motor available