


Type CL, CLV, CL-MD



Flows to 340 GPM / Heads to 150 feet

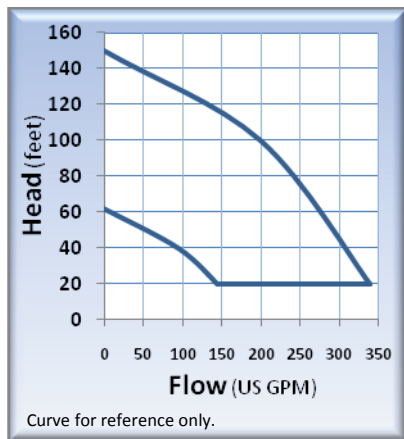

MODELS:

CL150 – 1 1/2" x 2" x 5.76"

CL150V – 1 1/2" x 2" x 5.76"

CL150MD – 1 1/2" x 2" x 5.76"

MATERIALS:

- SS (316 Stainless Steel)

FEATURES (CL):

- NEMA 56C motor frame - Standard
- Frame mount & base plate option available
- Mechanical seal: 1 1/2" Type 21 Viton®, carbon vs. ceramic
- Seal flush optional



FEATURES (CL-MD):

- Sealless design
- NEMA 56C motor frame - Standard
- Bushing options: Alpha silicon carbide bushing & washer

APPLICATIONS:

- Acids, alkalis, glycols, solvents, caustics
- Reverse osmosis
- Scrubbers
- Filters
- Washers
- Deionized water