


Type OH

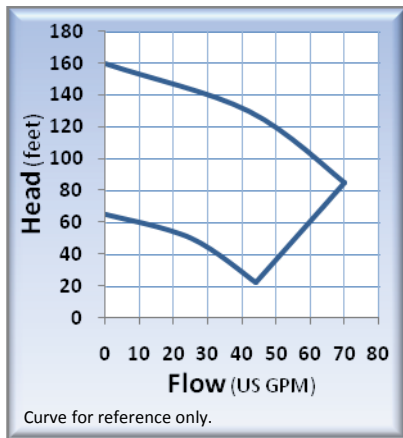

MODELS:

OH75CP – 3/4" x 1" x 6.12"

OH75PF – 3/4" x 1" x 6.03"



Flows to 70 GPM / Heads to 160 feet

MATERIALS:

- CP (Natural CPVC)
- PF (Natural PVDF)

APPLICATIONS:

- Sump pumping
- Electronics
- Photo processing
- Water treatment
- Acid transfer
- Chillers
- Metal etching
- Recirculating



OH75

FEATURES:

- Compact close coupled design
- NEMA 56C motor frame - Standard
- Frame mount & base plate option available
- Mechanical seal: 1" Type 36 Viton®, carbon vs. ceramic