

Series: PF5CU

Self-Priming Frame Mounted Pumps
1-1/2" Suction x 1-1/2" Discharge NPT, Female



DISCHARGE	1-1/2" x 1-1/2" NPT, Female
LIQUID TEMPERATURE	160°F Continuous
VOLUTE	Cast Iron, Class 30, Removable
BODY	Cast Iron, Class 30
PEDESTAL	Cast Iron, Class 30
SHAFT	Stainless Steel
IMPELLER	Open trash type, dynamically balanced Material: Cast Iron, Class 30
O-RINGS	Buna-N
HARDWARE	Steel & Stainless Steel
PAINT	Air dry enamel
SEAL	Mechanical, Self-lubricating Material: Carbon/Ceramic/Buna-N
BEARING-DRIVE END	Single Row, Ball, Grease Lubricated
BEARING-PUMP END	Single Row, Ball, Grease Lubricated
CHECK VALVE	Neoprene Flap type valve, with steel weight




Series: PF5CU

1-1/2" x 1-1/2"
Universal Drive /Frame Mtd

Description

Self-Priming frame mounted pumps for Industrial, Municipal and Marine applications.

**Self-Priming Frame Mounted Pumps
1-1/2" Suction x 1-1/2" Discharge NPT, Female**

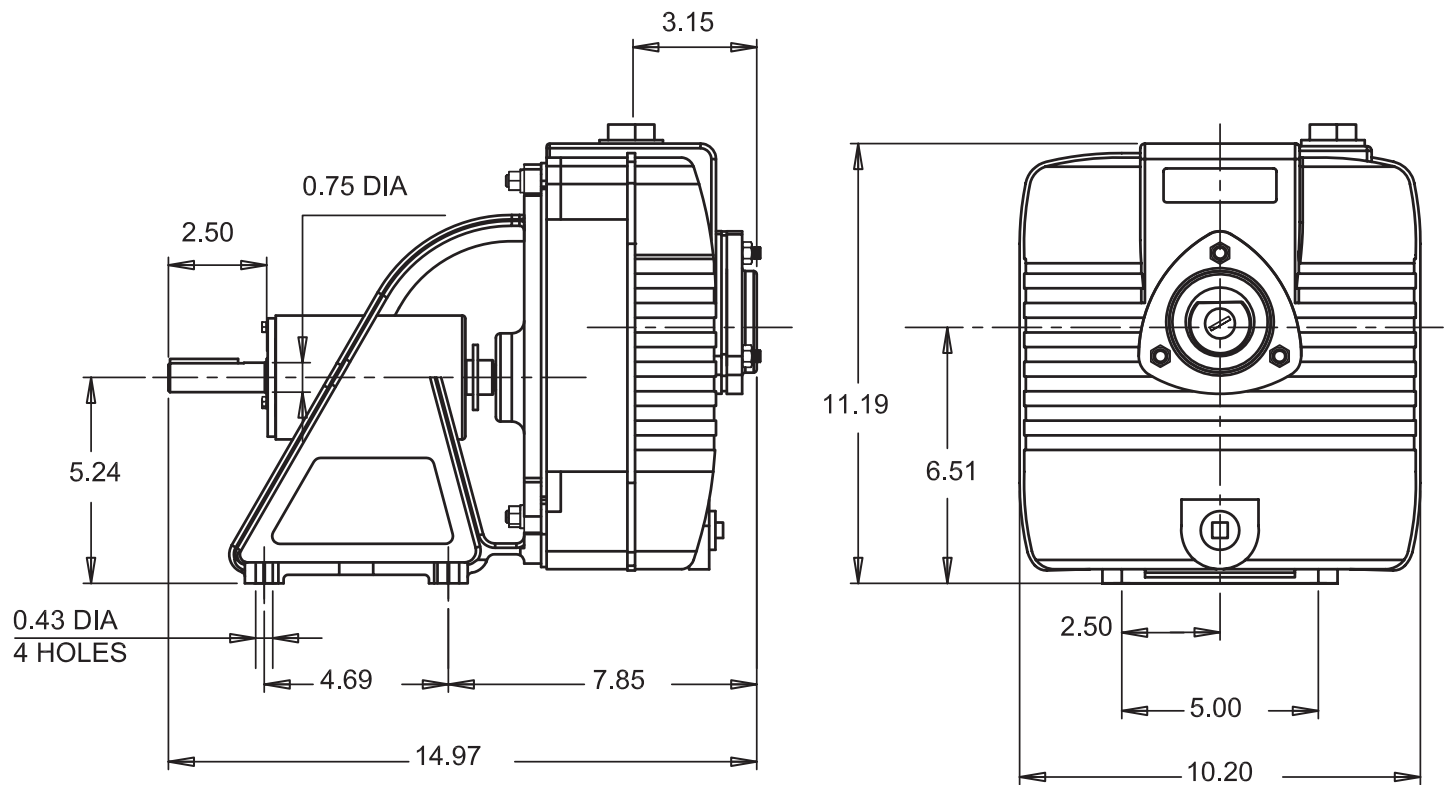

Model	Weight	
PF5CU	78 lbs	

Not for pumping flammable liquids or hazardous materials that is not compatible with pump materials.

Series: PF5CU

Self-Priming Frame Mounted Pumps
1-1/2" Suction x 1-1/2" Discharge NPT, Female

