

Series: PF30MU

Self-Priming Frame Mounted Pumps
4" Suction x 4" Discharge NPT, Female



DISCHARGE	4" x 4" NPT, Female
LIQUID TEMPERATURE	160°F Continuous
VOLUTE/WEARPLATE	Cast Iron, ASTM A48, Class 30
SEAL PLATE	Cast Iron, ASTM A48, Class 30
PEDESTAL	Cast Iron, ASTM A48, Class 30
SHAFT	Steel
IMPELLER	Open trash type. Material: Cast Iron, ASTM A48, Class 30
O-RINGS	Buna-N
HARDWARE	Steel
PAINT	Air dry enamel
SEAL	Single Mechanical Material: Carbon/Ceramic/Buna-N
PUMP END BEARING	Single Row, Ball, Oil Lubricated
DRIVE END BEARING	Double Row, Ball, Oil Lubricated
CHECK VALVE	Neoprene Flap type valve, with cast iron weight




Series: PF30MU

4" x 4"
Universal Drive/Frame Mtd
Trash/Solids Handling

Description

Self-Priming frame mounted pumps for Industrial, Municipal and Marine applications.

**Self-Priming Frame Mounted Pumps
4" Suction x 4" Discharge NPT, Female**

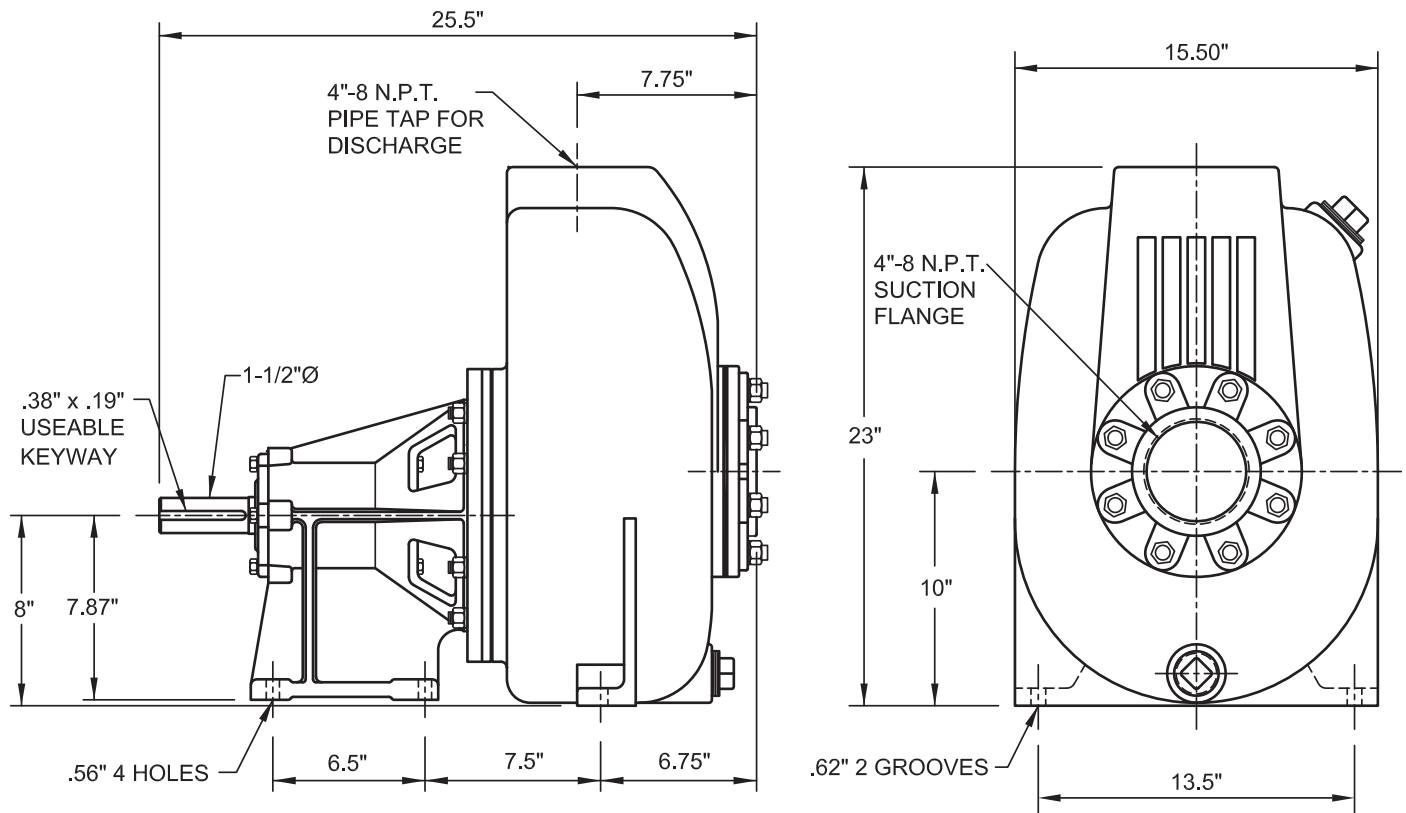

Model	Weight	
PF30MU	330 lbs	

Not for pumping flammable liquids or hazardous materials that is not compatible with pump materials.

Series: PF30MU

Self-Priming Frame Mounted Pumps
4" Suction x 4" Discharge NPT, Female

