


Ultra-Containment Berm, Collapsible Wall Model®

Economical Design Sets Up Quickly — Provides Secure Containment

- The Collapsible Wall Model Containment Berm features rugged PVC sidewall assemblies for sidewall support. Simply swivel the “feet” of the PVC supports to lower or raise the sidewalls in just seconds!
- Meets SPCC and EPA Container Storage Regulations 40 CFR 264.175.
- Custom sizes available.



8400

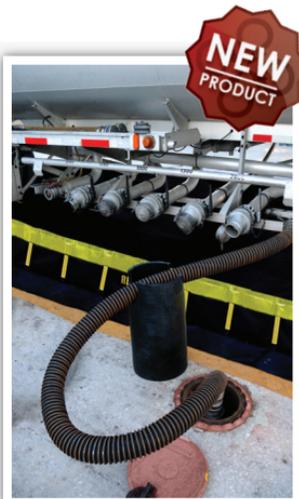

Optional Ultra-Hose Stand
Part# 8328



Simply swivel the “feet” of the PVC supports to lower the sidewall. Vehicles and equipment can then roll over the top of the collapsed wall for convenient entry and exit.

Ultra-Containment Berm, Collapsible Model®

Part#	Dimensions ft. (m)	Containment Capacity gal. (L)	Weight lbs. (kg)
8405	4 x 6 x 1 (1.2 x 1.8 x 0.3)	179 (678)	43.0 (19.5)
8403	6 x 6 x 1 (1.8 x 1.8 x 0.3)	269 (1,018)	46.0 (21.0)
8400	10 x 10 x 1 (3.0 x 3.0 x 0.3)	748 (2,831)	70.0 (32.0)
8404	12 x 60 x 1 (3.7 x 18.3 x 0.3)	5,385 (20,382)	323.0 (147.0)
8401	15 x 50 x 1 (4.6 x 15.2 x 0.3)	5,610 (21,234)	319.0 (145.0)
8402	15 x 66 x 1 (4.6 x 20.1 x 0.3)	7,405 (28,028)	420.0 (191.0)

Options: Track Belts, Ground Tarps, Pull Over Covers, Self Bailer (pg. 39), Hose Stand

Material of Construction: Copolymer 2000™, an ethylene copolymer, is standard. Copolymer 3000™, XR5, polyurethane and other materials are also available on a custom basis.